




The photograph may not match the reference exactly. Please read the product description to identify the finish.

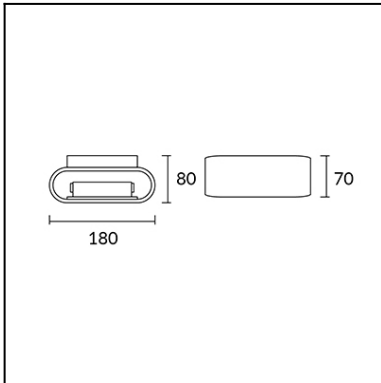

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Light source 1:	1 x R7s 100W
Total power consumption (W):	100
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	0.665
EAN:	8435111091777




MATERIALS / FINISHES

Structure material: Extruded aluminium

Structure finish: Matt white

[Download photometric file .ldt / .ies](#)

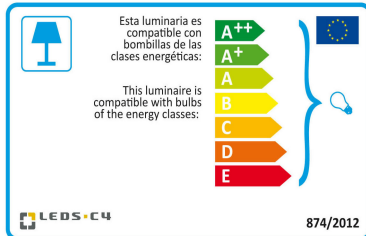


[Click on image to download energy label](#)

Luminaire		Measur.		Lamp		
Code	05-0534-14-14	Code	05-0534-14-14	Code	100T3 Q/CL/CP 230V	
Name	Aplique 1x100W R7s	Name	Aplique 1x100W R7s	Number	1	
Line	Eulumdat	Date	16-01-2013	Position		
Efficiency	75.97%	Coordinate system	CG	Total Flux	1600.00 lm	
Maximum value	298.24 cd	Position	C=90.00 G=30.00	Asymmetrical		
Rectangular Luminaire	Length	70 mm	Width	180 mm	Height	80 mm
Rectangular Luminous Area	Length	70 mm	Width	168 mm	Height	47 mm
Horizontal Luminous Area	0.011760 m2	Emitting area on Plane 180°		0.003360 m2		
Emitting area on Plane 0°	0.003360 m2	Emitting area on Plane 270°		0.008064 m2		
Emitting area on Plane 90°	0.008064 m2	Glare area at 76°		0.006105 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1600.00 lm		
Operator	Asselum T2	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	100T3 Q/CL/CP 230V	100T3 Q/CL/CP 230V - 100.00 W	1600.00	100.00	1	
C.I.E.	52 84 96 50 76	D DIN 5040	C41			
F UTE	0.38 D + 0.38 T	B NBN	BZ 4			

70mm x 180mm



C Halfplanes

180.0 — 0.0 (Red line)

270.0 — 90.0 (Blue line)

ULOR 37.99 %

DLOR 37.99 %

RN 50.00 %

