



Design by Nahtrang Design



The photograph may not match the reference exactly. Please read the product description to identify the finish.

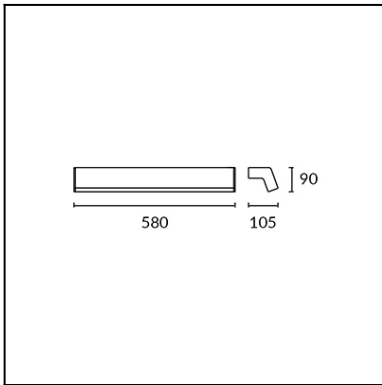

Download photometric file .ldt /.ies

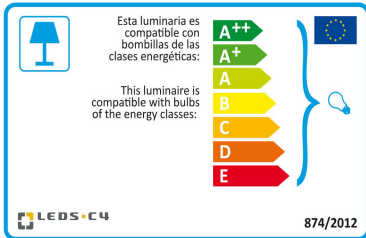

Click on image to download energy label

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	2 x G5 14W
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.175
EAN:	8435111089859



MATERIALS / FINISHES

Structure material:	Extruded aluminium	Diffuser material:	Polycarbonate
Structure finish:	Chrome	Diffuser finish:	Matt opal


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp			
Code	05-4699-21-M1	Code	05-4699-21-M1	Code	TL5 HE sup80 14W/840		
Name	Aplique 2x14W t dif. acrílico	Name	Aplique 2x14W t dif. acrílico	Number	2		
Line	Eulumdat	Date	25-06-2013	Position			
Efficiency	41.55%	Coordinate system	CG	Total Flux	2400.00 lm		
Maximum value	185.88 cd	Position	C=0.00 G=0.00	Sym. on planes	270-90		
Rectangular Luminaire	Length	87 mm	Width	585 mm	Height	106 mm	
Rectangular Luminous Area	Length	70 mm	Width	575 mm	Height	45 mm	
Horizontal Luminous Area	0.040250 m2	Emitting area on Plane 180°	0.003150 m2	Emitting area on Plane 270°	0.025875 m2	Glare area at 76°	0.012794 m2
Symmetry Type	Sym. on planes 270-90	Maximum Gamma Angle	180	Measurement Flux	2400.00 lm		
Operator	Asselum T2	Source voltage		Source current		Photocell	
Temperature	25.00 °C						
Humidity	60.00 %						
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	TL5 HE sup80 14W/840	TL5 HE sup80 14W/840 - 14.00 W	1200.00	14.00	2	
C.I.E.	37 65 85 70 42	D DIN 5040				B21
F UTE	0.29 H + 0.13 T	B NBN				BZ 6

87mm x 585mm



C Halfplanes

270.0 — Blue line

180.0 — Red line

90.0 — Blue line

ULOR 12.56 %

DLOR 28.99 %

RN 30.23 %

