

1190

Forte

**CONSTRUCTION & DESIGN**

- Recessed LED exterior wall light
- Constructed in pressure die cast aluminium alloy and finished in durable textured black powdercoated paint
- Robust housing for superior protection
- Recessed luminaire with glare free illumination
- Frosted tempered glass, silicone seals and stainless steel fasteners provide IP65 protection
- Plastic installation box included with each fitting to facilitate installation and maintenance
- Ideal for illuminating floors and pathways

TECHNICAL PERFORMANCE


- 8W or 13W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality Japanese LED Module with high lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K, 4K, and 5K colour temperature with low colour shift over time

OPTICAL & THERMAL PERFORMANCE

- Components are mounted on custom design aluminium for optimum heat sinking
- High efficiency optical reflector made from anodised aluminium

ELECTRICAL SYSTEM

- Supplied completely assembled with integral leading and trailing dimmable driver and terminal block
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

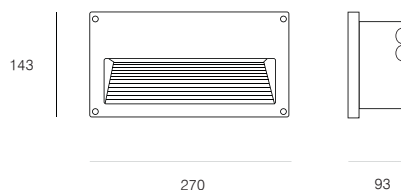

	Weight (kg)	3K and 4K CRI >85	5K CRI >75				IP65
	0.8						

TOTAL SYSTEM POWER CONSUMPTION = 8W /13W

CODE ORDERING GUIDE: Product Code – Colour SUFFIX

Example: 1190-3K-8W-07

WATTAGE	COLOUR TEMPERATURE	> 55° WIDE	HOT LED LUMENS
		PRODUCT CODES	
8W	3K	1190-3K-8W	828
	4K	1190-4K-8W	870
	5K	1190-5K-8W	888
13W	3K	1190-3K-13W	1519
	4K	1190-4K-13W	1607
	5K	1190-5K-13W	1646

supplied as standard with integral leading & trailing edge mains dimmable driver

COLOUR OPTION: add suffix after the code

-07 Textured Black