


1350

# Syncro

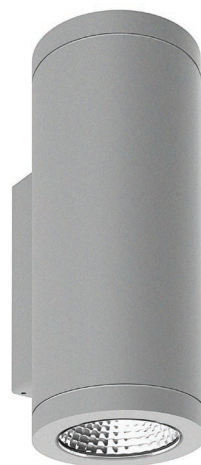

IP66

## CONSTRUCTION & DESIGN

- Surface mounted LED exterior wall light
- Constructed from pressure die cast aluminium alloy with extruded aluminium body and finished in textured white, textured black and textured silver durable polyester powdercoated paint
- High performance fixed wall luminaire designed with LED technology providing optimal and uniform light output with low power consumption
- Clear tempered glass lens with silicone seals provide IP66 protection
- Corrosion resistant
- Ideal for indoor and outdoor application where dust or moisture may be present

## TECHNICAL PERFORMANCE


- 2x13W or 2x22W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality Japanese LED Module with high lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K, 4K, and 5K colour temperature with low colour shift over time

## OPTICAL & THERMAL PERFORMANCE

- Customised heatsink provides premium optical and thermal performance
- Efficient optical control with no harsh cut off and ultra low glare

## ELECTRICAL SYSTEM

- Supplied completely assembled with integral leading and trailing edge mains dimmable driver and terminal block
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

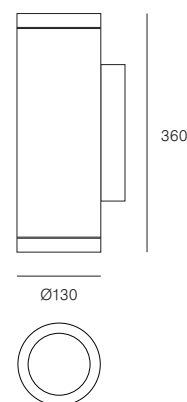

	TWO WAY	Weight (kg) 4.2	3K and 4K CRI >85	5K CRI >75				IP66
--	---------	--------------------	----------------------	---------------	--	--	--	------

TOTAL SYSTEM POWER CONSUMPTION = 26W /44W

CODE ORDERING GUIDE: PRODUCT CODE / DIMMING SUFFIX (if required) – COLOUR SUFFIX  
 Example: 1350-VNSP-3K-26W-03 or 1350-VNSP-3K-26W/DALI-03

WATT	COLOUR TEMP.				HOT LED LUMENS
		PRODUCT CODES			
2x13W	3K	1350-VNSP-3K-26W	1350-SP-3K-26W	1350-VWFL-3K-26W	3038
	4K	1350-VNSP-4K-26W	1350-SP-4K-26W	1350-VWFL-4K-26W	3214
	5K	1350-VNSP-5K-26W	1350-SP-5K-26W	1350-VWFL-5K-26W	3292
2x22W	3K	1350-VNSP-3K-44W	1350-SP-3K-44W	1350-VWFL-3K-44W	4828
	4K	1350-VNSP-4K-44W	1350-SP-4K-44W	1350-VWFL-4K-44W	5168
	5K	1350-VNSP-5K-44W	1350-SP-5K-44W	1350-VWFL-5K-44W	5236
DIMMING OPTIONS: ADD SUFFIX AFTER THE CODE				2x13W	2x22W
/DALI	Dali Dimming			✓	✓
/DSI	DSI Dimming			✓	✓
	Switch Dim			✓	✓
/AD	Analogue Dimming 1-10V			✓	✓
	Leading & Trailing edge mains dimming			STANDARD	STANDARD
COLOUR OPTIONS: ADD SUFFIX AFTER THE CODE					
-03		Textured White			
-07		Textured Black			
-11		Textured Silver			