

1586

## Civic 4

**CONSTRUCTION & DESIGN**

- Surface mounted LED fixed luminaire
- Body constructed in steel and finished in satin white powdercoated paint or polished chrome
- Low profile luminaire with precision optical control to maximise light performance which outperforms similar fixtures with improved efficacy and minimized maintenance
- Flexible opal diffuser for IP40 protection
- Can be ceiling or wall mounted
- Ideal for applications in apartments, schools, aged care homes, kitchens and laundries

**TECHNICAL PERFORMANCE**


- 20W total system power consumption with overload and short circuit protection
- >75,000 hours lifespan (L70)
- Premium quality Japanese LED Module with high lumen output per watts
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K, and 5K colour temperature with very low colour shift over time

**OPTICAL & THERMAL PERFORMANCE**

- LED system consist of self cooling linear LED modules for premium and thermal performance
- Wide beam distribution with no harsh cut off and ultra low glare

**ELECTRICAL SYSTEM**

- Supplied complete with integral leading and trailing edge mains dimmable driver and terminal block, also compatible with a range of dimming systems
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

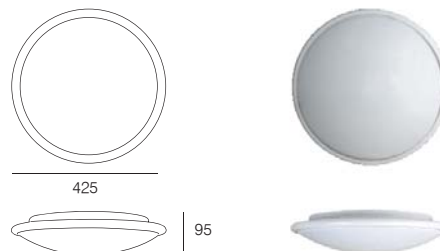

Weight (kg)	3K and 4K	5K						
0.6	CRI >85	CRI >75						



TOTAL SYSTEM POWER CONSUMPTION = 20W

CODE ORDERING GUIDE: PRODUCT CODE /DIMMING SUFFIX (if required) – COLOUR SUFFIX  
 Example: 1586-3K-01 or 1586-3K/DALI-01

WATTAGE	COLOUR TEMPERATURE			HOT LED LUMENS
		PRODUCT CODES		
20W	3K	1586-3K		2250
	4K	1586-4K		2340
	5K	1586-5K		2400

DIMMING OPTIONS: ADD SUFFIX AFTER THE CODE			20W
/DALI	Dali Dimming		✓
/DSI	Digital Dimming		✓
	Switch Dim		✓
/AD	Analogue Dimming 1-10V		✓
	Leading & Trailing edge mains dimming		STANDARD

COLOUR OPTIONS: ADD SUFFIX AFTER THE CODE

- 01  Satin White
- 16  Polished Chrome

Polished Chrome

