




The photograph may not match the reference exactly. Please read the product description to identify the finish.

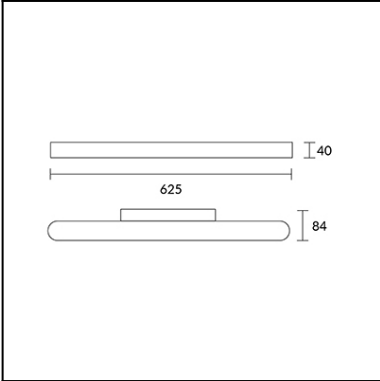


TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Light source 1:	1 x G5 14W
Total power consumption (W):	15.2
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	4
Net Weight (Kg):	1.74
EAN:	8435111051276



[Download photometric file .ldt /.ies](#)

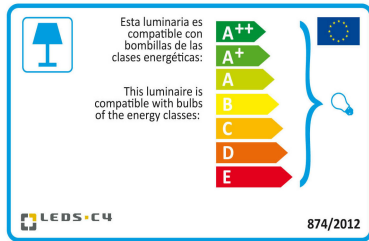

[Click on image to download energy label](#)

MATERIALS / FINISHES

Structure material:	Steel	Diffuser material:	Glass
Structure finish:	Chrome	Diffuser finish:	Satin


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp		
Code	493-CR	Code	493-CR	Code	TL5 HE sup80 14W/840	
Name	Aplique dir/ind 1x14W T5 opal	Name	Aplique dir/ind 1x14W T5 opal	Number	1	
Line	Eulumdat	Date	13-02-2009	Position		
Efficiency	56.31%	Coordinate system	CG	Total Flux	1200.00 lm	
Maximum value	130.30 cd	Position	C=0.00 G=5.00	Double Symmetrical		
Rectangular Luminaire	Length	625 mm	Width	82 mm	Height	40 mm
Rectangular Luminous Area	Length	620 mm	Width	48 mm	Height	39 mm
Horizontal Luminous Area	0.029760 m2	Emitting area on Plane 180°		0.024800 m2		
Emitting area on Plane 0°	0.024800 m2	Emitting area on Plane 270°		0.001920 m2		
Emitting area on Plane 90°	0.001920 m2	Glare area at 76°		0.031263 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	180			
Measurement Distance	0.00	Measurement Flux	1200.00 lm			
Operator	Asselum	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	TL5 HE sup80 14W/840	TL5 HE sup80 14W/840 - 14.00 W	1200.00	14.00	1
C.I.E.	50 81 96 50 56	D DIN 5040	C31		
F UTE	0.28 D + 0.28 T	B NBN	BZ 4		

625mm x 82mm



C Halfplanes

180.0 — 0.0

270.0 — 90.0

ULOR 28.16 %

DLOR 28.16 %

RN 50.00 %

