




Pendant Luminaires | 99-305 V | Module 25 W 700 mA | CRI 90
7892

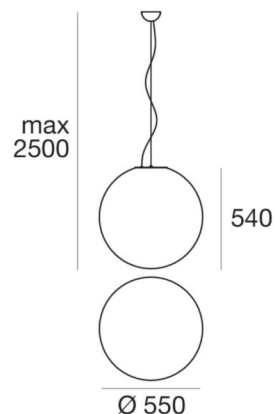

Technical data	
Collection	linealight
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	Module
Optic	Diffused
Light emission direction	downward and
Power	25 W
Luminous flux (source)	3063 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP20
Glow wire test	850°
Operating temperature	70 °C
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	grainy polypropylene
Colour	transparent

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating



Pendant Luminaires | 99-305 V | Module 25 W 700 mA | CRI 90
7892

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 88 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3063 lm, with a 122.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The diffuser is made of grainy polypropylene; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4.368 kg. The power supply driver is included in the delivery.

The total absorbed power is 25 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features

Luminous flux (source)	3063 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra