



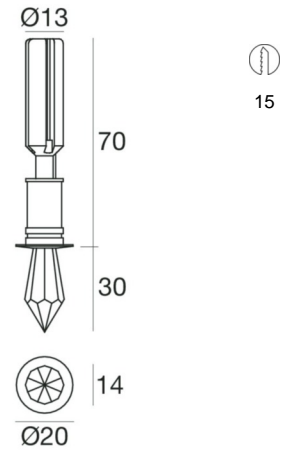

Downlights | 1 x powerLED 1,5 W 500 mA | CRI 80
87324C00



Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optic	Diffused
Power	1.5 W
Luminous flux (source)	185 lm
Current intensity	500mA
CCT / Tonalità	5000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	No

Finishing casing


Material	Brass
Colour	chrome
Processing	Electroplating


Finishing diffuser


Material	Glass
Colour	transparent


Electronics


-  On/Off Driver

-  On/Off Driver

-  On/Off Driver

-  1-10V - N/O button

-  DALI - Push and Simply Dim

-  On/Off Driver



Downlights | 1 x powerLED 1,5 W 500 mA | CRI 80
87324C00

Single emission downlights for indoor application. The cold white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 5000 K and a CRI 80; the source luminous flux is 185 lm, with a 185.0 lm/W nominal luminous efficacy.

The device body is made of brass and features a chrome finish, processed by means of electroplating; the diffuser is made of glass. The ingress protection degree is IP20; the total weight is of 0.056 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1,5 W. The power supply cable is included and features.

The device features protection class III and can be ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84917(for concrete or masonry).

Illuminotechnical Features

Luminous flux (source)	185 lm
Colour temperature	5000 K
Colour rendering index	80 Ra



Beriel | Downlights | Accessories
87324C00



Outer casing
L=80mm, H=60mm, D=60mm

Code
84917