




Wall Lights | 2 x powerLED 2,0 W 350 mA | CRI 80
92282W70




Technical data	
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Optic	70°
Power	2 W
Luminous flux (source)	260 lm
Current intensity	350mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP66
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes


Finishing casing

Material	Aluminium
Colour	grey RAL 9006
Processing	Coating


Electronics



On/Off Driver



On/Off Driver



On/Off Driver

Wall Lights | 2 x powerLED 2,0 W 350 mA | CRI 80
92282W70

Double emission wall lights for outdoor application. The warm white LED light source with a 70° light distribution is composed of 2 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 260 lm, with a 130.0 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a grey ral 9006 finish, processed by means of coating. The ingress protection degree is IP66; the total weight is of 0.108 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2,0 W. The power supply cable is included and features.

The device features protection class III and can be wall lights-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	51 %
Luminous flux (source)	260 lm
Luminaire luminous flux	135 lm
Consumption	2,0 W
Luminaire efficacy	67 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	< 25

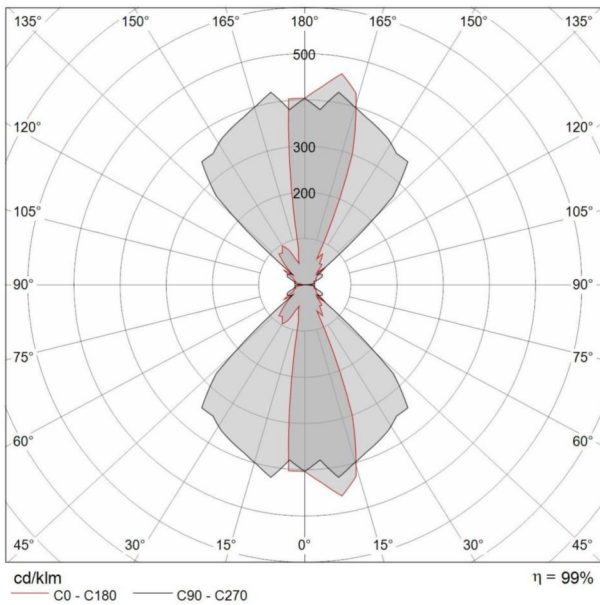



Outer casing
L=42mm, H=35mm, D=35mm

Code
84336



Outer casing
L=49mm, H=60mm, D=60mm

Code
84915

Springs

Code
LED-MOL008ACC

Springs

Code
LED-MOL009