





Wall Lights | 1 x powerLED W 350 mA | CRI 80
92324W05



15



Technical data	
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optic	5°
Power	1 W
Luminous flux (source)	107 lm
Current intensity	350mA
CCT / Tonaltà	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	No

Finishing casing

Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Electronics

	On/Off Driver 1 art.
	On/Off Driver 3 art.
	On/Off Driver 6 art.
	DALI - Push and Simply Dim 1 art.
	1-10V - N/O button 1 art.

Wall Lights | 1 x powerLED W 350 mA | CRI 80 92324W05

Single emission wall lights for indoor application. The warm white LED light source with a 5° light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 107 lm, with a 107.0 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0.016 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1,0 W. The power supply cable is included and features.

The device features protection class III and can be wall lights or ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84335(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	91 %
Luminous flux (source)	107 lm
Luminaire luminous flux	98 lm
Consumption	1,0 W
Luminaire efficacy	98 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	> 25

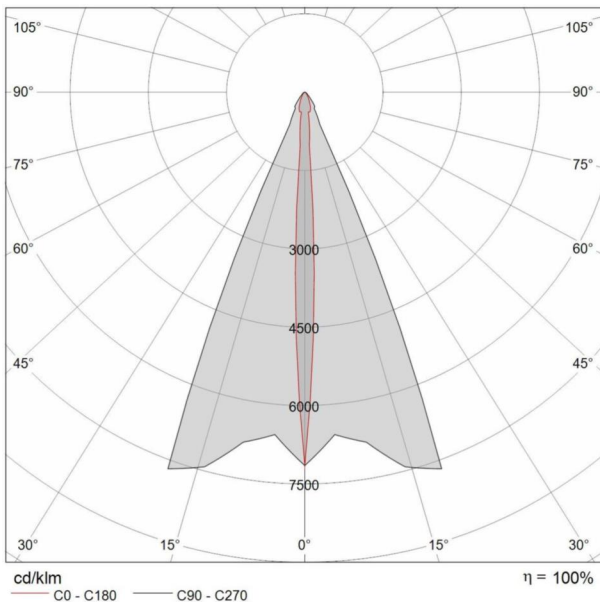

Abstand [m]	Cone diameter [m]	Iluminance [lx]
0.5	95.49	E(0°) 2802 E(C0) 89.4° 0
1.0	190.98	E(0°) 701 E(C0) 89.4° 0
1.5	286.47	E(0°) 311 E(C0) 89.4° 0
2.0	381.96	E(0°) 175 E(C0) 89.4° 0
2.5	477.45	E(0°) 112 E(C0) 89.4° 0
3.0	572.94	E(0°) 78 E(C0) 89.4° 0

Abstand [m] Cone diameter [m] Iluminance [lx]
C0 - C180 (Hal beam angle: 178.8°)



Outer casing
L=35mm, H=20mm, D=20mm

Code
84335

Springs

Code
LED-MOL003

Springs

Code
LED-MOL004