







Uplights | 1 x powerLED 1,5 W 500 mA | CRI 80
97354W18



| Technical data | |
|--|---------------|
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Optic | 180° |
| Power | 1.5 W |
| Luminous flux (source) | 143 lm |
| Current intensity | 500mA |
| CCT / Tonalità | 3000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | CC |
| Safety class | 3 |
| IP | IP67 |
| IK | 10 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Operating temperature | -20°C / +50°C |
| Driver included | No |
| Emergency mode | No |
| Directional | No |
| Tilting | No |
| Walk-over | Yes |
| Drive-over | 1500 Kg |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |

| Finishing casing | |
|------------------|----------------------|
| Material | Stainless steel 316L |
| Colour | steel |
| Processing | Brushing |

Electronics



Uplights | 1 x powerLED 1,5 W 500 mA | CRI 80
97354W18

Single emission uplights for outdoor application. The warm white LED light source with a 180° light distribution is composed of 1 powerled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 143 lm, with a 143.0 lm/W nominal luminous efficacy.


The device body is made of stainless steel and features a steel finish, processed by means of brushing. The ingress protection degree is IP67; the total weight is of 0.158 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1,5 W. The power supply cable is included and features.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

| Illuminotechnical Features | |
|----------------------------|---------|
| Light Output Ratio (LOR) | 100 % |
| Luminous flux (source) | 143 lm |
| Luminaire luminous flux | 143 lm |
| Consumption | 1,5 W |
| Luminaire efficacy | 95 lm/W |
| Colour temperature | 3000 K |
| Colour rendering index | 80 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 25 |
| UGR axial | > 25 |

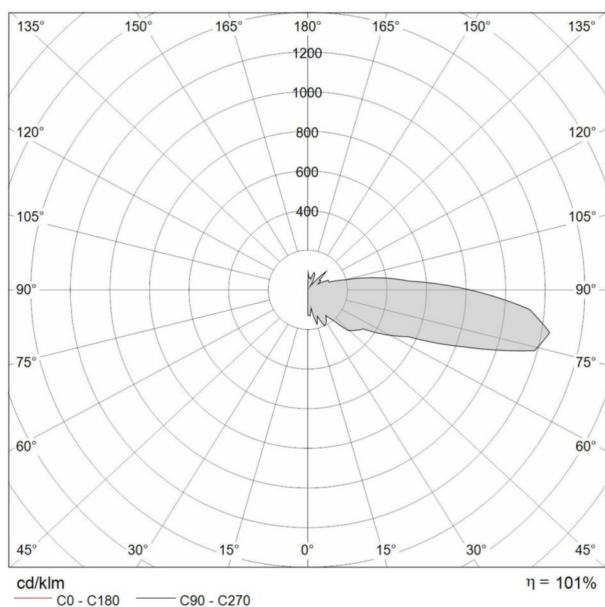



Alcor_1 | Uplights | Accessories
97354W18



Outer casing
L=87mm, H=60mm, D=60mm

Code
84918

Fixing kit

Code
LED-SAC013