LedsC4

Product Code
05-9912-Z5-CL

Installation Instructions
3D File
Photometry
Revit (BIM)

Afrodita LED 220mm Single Emission

LedsC4 Team

Wall fixture IP65 Afrodita LED 220mm Single Emission LED 11.2 LED warm-white 3000K ON-OFF Urban grey 993lm

Technical features

Luminaire total power: 11.2W
Real lumens: 993
Real lm/W: 89
Correlated Colour Temperature (CCT): LED warm-white 3000K
Lens / reflector angle: FLOOD 90°
Structure material: Aluminium
Structure finish: Urban grey
Diffuser material: Glass
Diffuser finish: Partly-sandblasted
Voltage / frequency: 100-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: 0.95
Useful life: 50,000h L80B20
Warranty: 5 años
Resistant to marine environments: Yes
Easily recyclable luminaire

IP65 IK04   BREEAM   DRIVER   E   A→G

Luminotechnic features

Melanopic ratio: 0.681
CRI: 80
MacAdam steps: 3
Photobiological risk: RG0
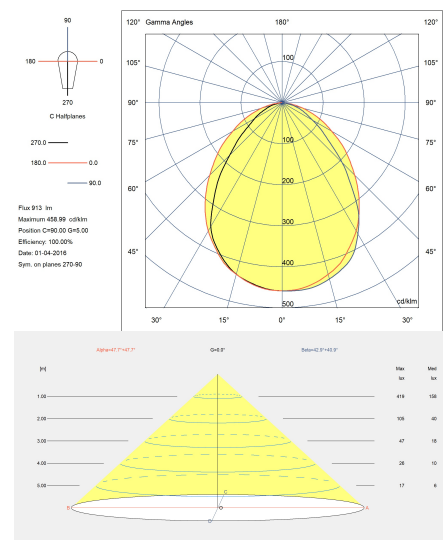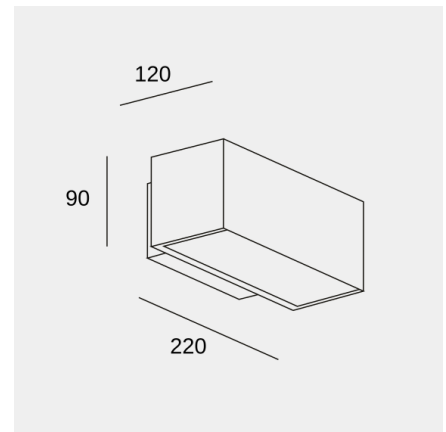
Lampholder	Quantity	Light source power (W)
LED	1	9.5W

120
90
220

120° Gamma Angles 180° 120°

Flux 913 lm
Maximum 458.99 cd/klm
Position C=90.00 G=5.00
Efficiency: 100.00%
Date: 01-04-2016
Sym. on planes 270-90

Alpha=42.7°+47.3° G=5.8° Beta=42.5°+45.5°

Max lux	Med lux
419	158
105	40
47	18
26	10
17	6

Afrodita LED 220mm Single Emission
05-9912-Z5-CL

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

06/09/2023
Página 1/2

LedsC4

Product Code
05-9912-Z5-CL

Installation Instructions
3D File
Photometry
Revit (BIM)

Afrodita LED 220mm Single Emission

LedsC4 Team

Wall fixture IP65 Afrodita LED 220mm Single Emission LED 11.2 LED warm-white 3000K ON-OFF Urban grey 993lm

Logistics

x 4

Net weight (kg): 1.39
Packaged weight (kg): 1.47
Packaging: 230mm x 130mm x 100mm

Afrodita LED 220mm Single Emission
05-9912-Z5-CL

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

06/09/2023
Página 2/2