


# Oxygen\_W1



Wall Lights | 220-240 V  
35 topLED 14 W DC - 17 W AC | CRI 90  
**8187**



Technical data	
Designer	Pio e Tito Toso
Construction year	2016
Type	Surface
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	14 W
Source lumens	2021 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1.326 Kg
Electrostatic discharge protection	No
Surge protection	No

## Finishing casing

Material	PU
Colour	Yellow/white

## Finishing diffuser

Material	PMMA
Colour	transparent
Processing	Laser engravings



Wall Lights | 220-240 V | 35 topLED 14 W DC - 17 W AC | CRI 90 | Base 8187

Double emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 35 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2021 lm, with a 144.4 lm/W nominal luminous efficacy.


The device body is made of pu and features a yellow/white finish; the diffuser is made of pmma with a laser engravings treatment. The ingress protection degree is IP40; the total weight is of 1.326 kg.

The total absorbed power is 14 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	39 %
Source lumens	2021 lm
Delivered lumens	789 lm
Consumption	17 W
Luminaire efficacy	46 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L80 B20 C0 80000h	

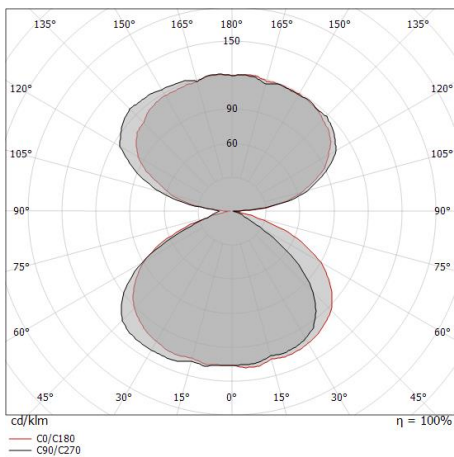



Oxygen\_W1 | Wall Lights | Accessories  
**8187**



Dimmer  
Bluetooth, 220-240V

**Code**  
KIT0079