


Oh!-C2_280



Systems | 220-240 V | 1 topLED 8 W DC 350 mA
CRI 80
12140

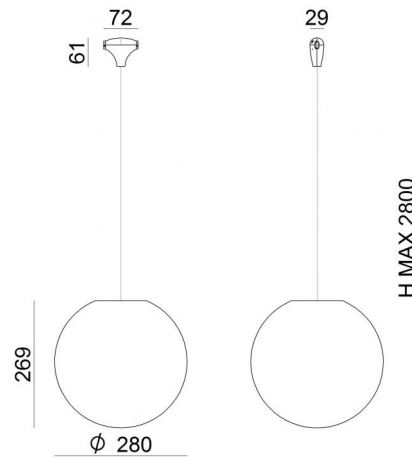

Technical data	
Type	Mono System
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	8 W
Source lumens	1002 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.5 m
Resin potting	No
Type of light emission	Double emission
Net weight	1.306 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	PC
Colour	white

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	PC
Colour	opaline



Systems | 220-240 V | 1 topLED 8 W DC 350 mA | CRI 80
12140

Double emission systems for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1002 lm, with a 125.3 lm/W nominal luminous efficacy.

The device body is made of PC and features a white finish; the diffuser is made of pe; the mounting frame is made of PC, with a opaline finish. The ingress protection degree is IP20; the total weight is of 1.306 kg.

The total absorbed power is 8 W. The power supply cable is included and features a 2.5 m length.

The device features protection class II and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features

Source lumens	1002 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25



Systems | 220-240 V | 1 topLED 8 W DC 350 mA | CRI 80
12140

Components

		Code <u>TR4111-4</u>
	Mono System Accessories	

		Code <u>TR4114-4</u>
	Mono System Accessories	

		Code <u>TR4119-4</u>
	Mono System Accessories	



		Code <u>TR4120-3</u>
	Mono System Accessories	



		Code <u>TR4120-8</u>
	Mono System Accessories	

		Code <u>TR4151-50</u>
	300 System Accessories	

		Code <u>TR4151-30</u>
	300 System Accessories	

		Code <u>TR4151-25</u>
	300 System Accessories	
