


Zig Zag_P



Pendant Luminaires | 220-240 V | 2xE27
6995

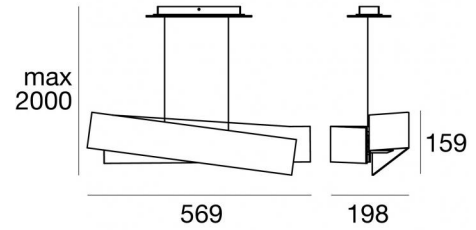

| Technical data | |
|--|------------------|
| Type | Surface |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Lamp cap | 2 x E27 Max 57W |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 2.3 m |
| Resin potting | No |
| Net weight | 2.100 Kg |

| Finishing casing | |
|------------------|----------------|
| Material | Aluminium |
| Colour | silver |
| Processing | Electroplating |

| Finishing diffuser | |
|--------------------|--------------|
| Material | Glass |
| Colour | white |
| Processing | Sandblasting |

| Finishing mounting frame | |
|--------------------------|-------------------------|
| Material | Iron |
| Colour | Embossed white RAL 9003 |
| Processing | Coating |



Pendant Luminaires | 220-240 V | 2xE27
6995

Double emission pendant luminaires for indoor application. Compatibility:
LED lamp, compact fluo 20 W, halogen 57 W; lamp cap 2xE27.

The device body is made of aluminium and features a silver finish, processed by means of electroplating; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 2.100 kg.

. The power supply cable is included and features a 2.3 m lenght.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features

| | |
|---|---------|
| Source lumens | 1830 lm |
| Colour temperature | 2800 K |
| Colour rendering index | 100 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25 |