

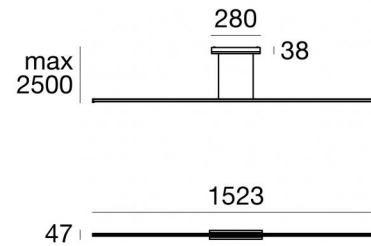


Straight_P1

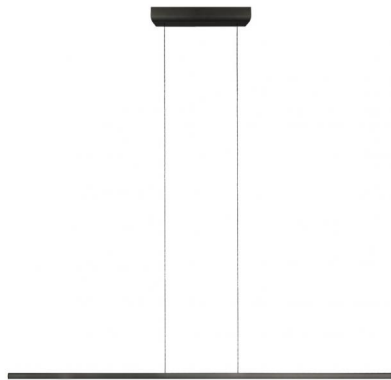

Pendant Luminaires | 220-240 V
150 topLED 18 W DC - 18 W AC | CRI 90
8205



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	18 W
Source lumens	2279 lm
Frequency	60 - 50 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.5 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.2 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	black RAL 9005
Processing	Coating

Finishing diffuser	
Material	PC
Colour	opaline

Finishing mounting frame	
Material	Iron
Colour	black RAL 9005
Processing	Coating



Pendant Luminaires | 220-240 V | 150 topLED 18 W DC - 18 W AC | CRI 90 | Base 8205


Single emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 150 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2279 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.2 kg.

The total absorbed power is 18 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

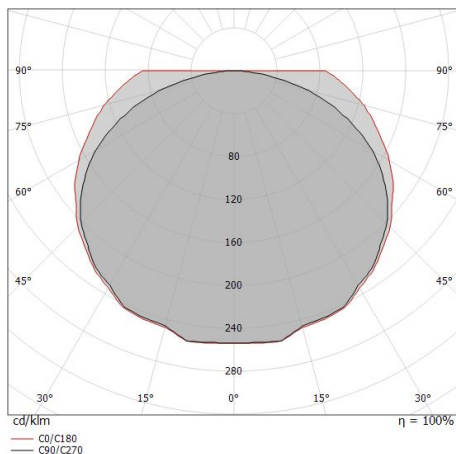

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	2.09 3.51	E(0°) 801 E(C90) 33 E(C0) 8
1.0	4.17 7.02	E(0°) 200 E(C90) 8 E(C0) 2
1.5	6.26 10.53	E(0°) 89 E(C90) 4 E(C0) 1
2.0	8.35 14.04	E(0°) 50 E(C90) 2 E(C0) 1
2.5	10.44 17.55	E(0°) 32 E(C90) 1 E(C0) 0
3.0	12.52 21.06	E(0°) 22 E(C90) 1 E(C0) 0

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 148.2°)
— C90/C270 (Half-peak divergence: 128.8°)

Illuminotechnical Features	
Light Output Ratio (LOR)	34 %
Source lumens	2279 lm
Delivered lumens	790 lm
Consumption	18 W
Luminaire efficacy	43 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

LED Life / Failure Ratio	
L80 B20 C0	80000h

UGR	
UGR axial	14.7
UGR transversal	11
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical 2
C0/C180 optics	148°
C90/C270 optics	129°