

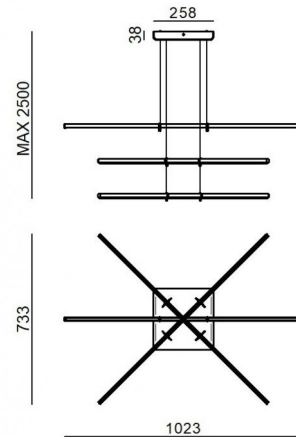


Straight_P3

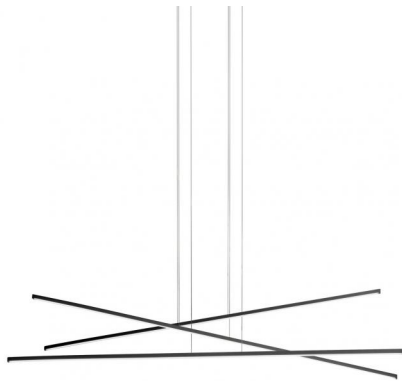

Pendant Luminaires | 220-240 V
100 topLED 34 W DC 1050 mA | CRI 90
8507



| Technical data | |
|--|------------------|
| Construction year | 2020 |
| Type | Surface |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | downward |
| Power | 34 W |
| Source lumens | 4557 lm |
| Frequency | 60 - 50 Hz |
| CCT / Tone | 2700 K |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 2.5 m |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 2.935 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

Finishing casing

| | |
|------------|----------------|
| Material | Aluminium |
| Colour | chrome |
| Processing | Electroplating |

Finishing diffuser

| | |
|----------|---------|
| Material | PC |
| Colour | opaline |

Finishing mounting frame

| | |
|------------|----------------|
| Material | Iron |
| Colour | chrome |
| Processing | Electroplating |



Pendant Luminaires | 220-240 V | 100 topLED 34 W DC 1050 mA | CRI 90
8507

Single emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 100 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 4557 lm, with a 134.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a chrome finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of iron, with a chrome finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 2.935 kg.

The total absorbed power is 34 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| Illuminotechnical Features | |
|---|----------------|
| Source lumens | 4557 lm |
| Colour temperature | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25 |
| LED Life / Failure Ratio | |
| L80 B20 C0 80000h | |