





Wall Lights | 220-240 V
80 stripLED 11 W DC - 14 W AC | CRI 90
8880



Technical data	
Type	Surface
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	stripLED
Optics	Diffused
Light emission direction	downward
Nominal power	11 W DC
Total Power	14 W
Source lumens	1640 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	0.875 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Iron
Colour	White
Processing	Coating

Finishing diffuser	
Material	Glass
Colour	transparent
Processing	Sandblasting

Finishing mounting frame	
Material	Iron
Colour	White
Processing	Coating



Wall Lights | 220-240 V | 80 stripLED 11 W DC - 14 W AC | CRI 90 | Base
8880


Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 80 stripled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1640 lm, with a 149.1 lm/W nominal luminous efficacy.

The device body is made of iron and features a white finish, processed by means of coating; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0.875 kg.

The total absorbed power is 14 W.

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

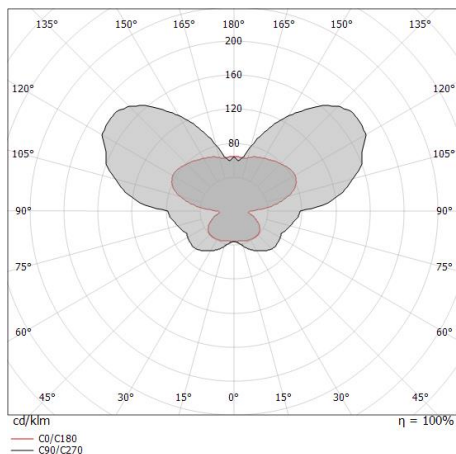

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	88 %
Source lumens	1640 lm
Delivered lumens	1457 lm
Consumption	14 W
Luminaire efficacy	104 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

UGR

UGR axial	16.2
UGR transversal	13
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	180°
C0/C180 optics	159°
Light distribution symmetry	Symmetrical 2 axis