

The Bob Each Way 65 profile is a compact uplight/downlight solution. A versatile system suitable for various mounting options, Bob Each Way 65 can be surface mounted, wall mounted and suspended. Both wire and rod suspension options are available for the Bob Each Way 65 profile.

MOUNTING OPTIONS		DIFFUSER OPTIONS		SUPER SERIES LED STRIP OPTIONS			SUPER SERIES LED STRIP OPTIONS		
Surface mounted	Opal	Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.		
Rod suspended	Clear	310lm		2700K	1955lm		2700K		
Wire suspended		330lm	3W	3000K	2060lm	20W	3000K		
Wall mounted		345lm		4000K	2160lm		4000K		
		760lm		2700K	2400lm		2700K		
		800lm	7W	3000K	2530lm	26W	3000K		
		840lm		4000K	2650lm		4000K		
		1520lm		2700K					
		1600lm	14W	3000K					
		1680lm		4000K					

- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
 - All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
 - 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES



ADDITIONAL INFORMATION

Applications Task lighting over kitchen islands or reception counters, mirror lighting.

Installation Interior or exterior (with IP67 rated LED strip).


Materials Extruded aluminium body, polycarbonate diffusers, aluminium end caps.

Finish Natural silver anodised or custom powder coat.

Light source LED ribbon strip.

Power supply 24V DC - remote driver options ranging from 6W up to 320W.

Dimmable Various options available, please enquire.

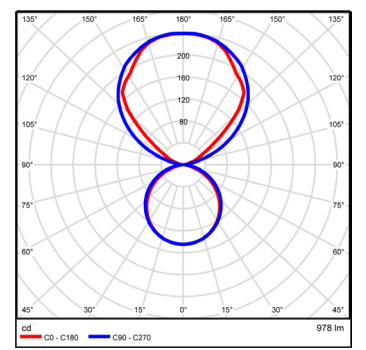

Polar curve for 1890 lumen LED strip down with opal diffuser and 1340 lumen LED strip up with clear diffuser.

