


The Flat Freddie 30 extrusion is a close cousin of Downhill Dan 30, but with a squarer profile for a more architectural look. It also features a more efficient diffuser for maximum output. Utilizing up to a 2650 lumen per metre LED strip, the profile is ideal for applications where maximum light output is key. A versatile system suitable for various mounting options, Flat Freddie 30 can be surface mounted, recessed and suspended. Both wire and rod suspension options are available and the cowl accessory for plastered ceilings and walls creates a beautiful trimless finish.

MOUNTING OPTIONS		DIFFUSER OPTIONS			SUPER SERIES LED STRIP OPTIONS		
Surface mounted	Satin	Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.
Wire suspended		310lm	3W	2700K	1955lm	20W	2700K
Rod suspended	330lm	3000K		2060lm	3000K		
Recessed	345lm	4000K		2160lm	4000K		
Wall mounted		760lm	7W	2700K	2400lm	26W	2700K
	800lm	3000K		2530lm	3000K		
	840lm	4000K		2650lm	4000K		
	1520lm	2700K					
	1600lm	14W		3000K			
	1680lm	4000K					


- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.  
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.  
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

## ACCESSORIES

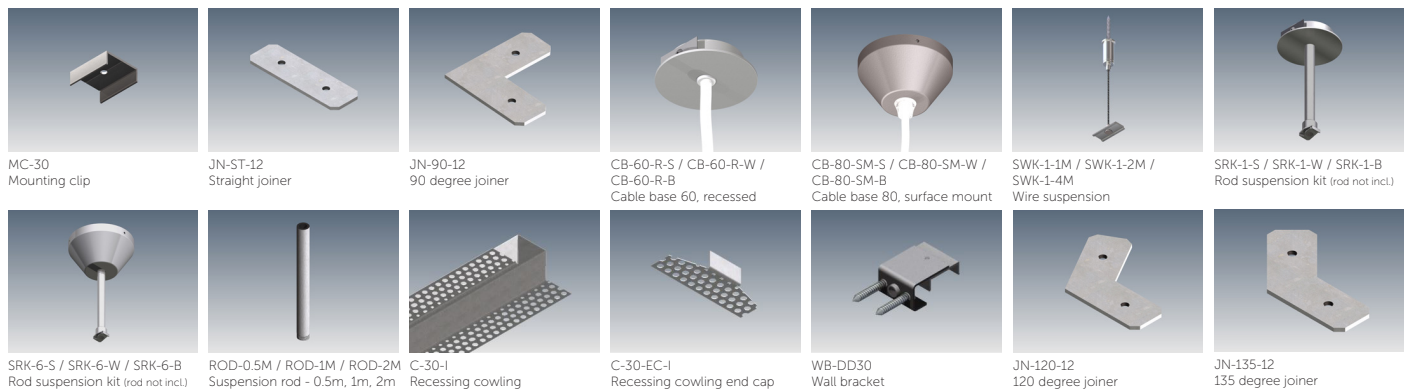

## ADDITIONAL INFORMATION

Applications	General downlighting in kitchens, living rooms, dining rooms, reception counters.
Installation	Interior or exterior (with IP67 rated LED strip).
Materials	Extruded aluminium body, PMMA diffuser, aluminium end caps.
Finish	Natural silver anodised or custom powder coat.
Light source	LED ribbon strip.
Power supply	24V DC - remote driver options ranging from 6W up to 320W.
Dimmable	Various options available, please enquire.

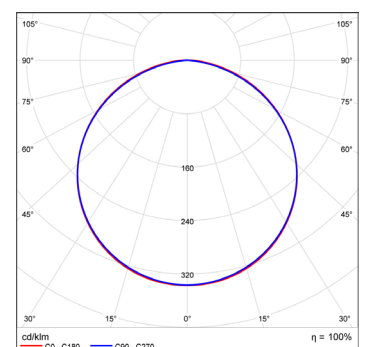

Polar curve for 2250 lumen LED strip with opal diffuser.

