
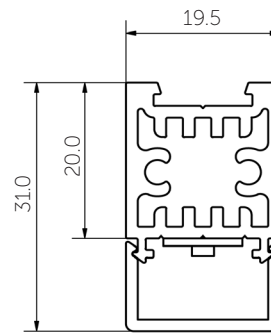


Sideways Sally 20R

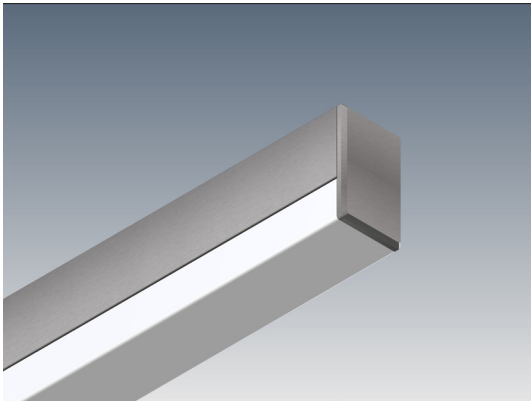

The Sideways Sally 20R extrusion is a compact uplight/downlight solution providing powerful LED lighting. A versatile system suitable for various mounting options, Sideways Sally 20R can be surface mounted, wall mounted and suspended. The concealed mounting clip provides a quick and secure fixing to joinery. Both wire and rod suspension options are available for the Sideways Sally 20R extrusion.

MOUNTING OPTIONS	DIFFUSER OPTIONS	SUPER SERIES LED STRIP OPTIONS		
Surface mounted	Satin	Lumens per metre	Watts per metre	Colour temp.
Rod suspended		310lm		2700K
Wire suspended		330lm	3W	3000K
Wall mounted		345lm		4000K
		760lm		2700K
		800lm	7W	3000K
		840lm		4000K
		1520lm		2700K
		1600lm	14W	3000K
		1680lm		4000K


- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES

JMC-12 Joinery mounting clip	JN-ST-12 Straight joiner	JN-90-12 90 degree joiner	CB-60-R-S / CB-60-R-W / CB-60-R-B Cable base 60, recessed	CB-80-SM-S / CB-80-SM-W / CB-80-SM-B Cable base 80, surface mount	SWK-1-1M / SWK-1-2M / SWK-1-4M Wire suspension	SRK-1-S / SRK-1-W / SRK-1-B Rod suspension kit (rod not incl)
SRK-6-S / SRK-6-W / SRK-6-B Rod suspension kit (rod not incl)	ROD-0.5M / ROD-1M / ROD-2M Suspension rod - 0.5m, 1m, 2m	WB-SS20 Wall bracket	JN-120-12 120 degree joiner	JN-135-12 135 degree joiner		

ADDITIONAL INFORMATION

Applications Task lighting over kitchen islands or reception counters, mirror lighting.
 Installation Interior or exterior (with IP67 rated LED strip).
 Materials Extruded aluminium body, PMMA diffuser, aluminium end caps.
 Finish Natural silver anodised or custom powder coat.
 Light source LED ribbon strip.
 Power supply 24V DC - remote driver options ranging from 6W up to 320W.
 Dimmable Various options available, please enquire.

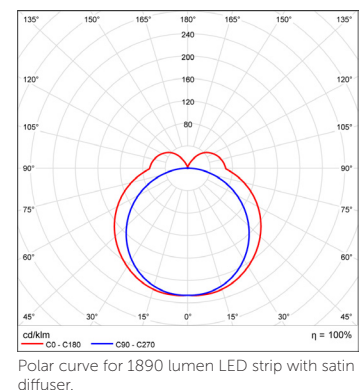

The Woolstore Management Ltd
GS1 New Zealand Inc
ABC Business Sales
Heart Foundation