
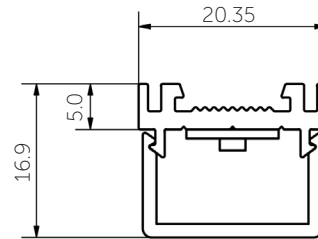


Sideways Sally 5R

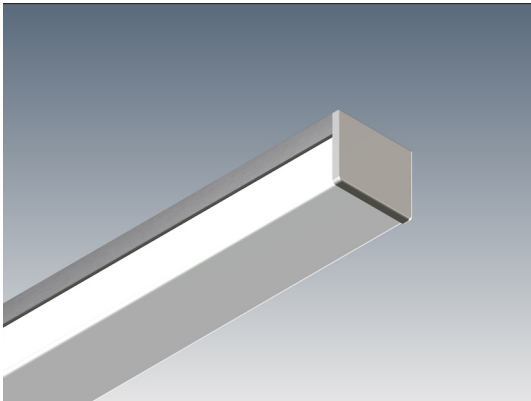


Sideways Sally 5R has many uses as a surface mounted profile solution, whether it is used as a slim-line mirror light in a bathroom, discrete task lighting under a shelf or tucked into a pelmet. With diffuser options of both curved and rectangular, this profile is sure to be a great addition to any specifier's tool kit.

| MOUNTING OPTIONS | DIFFUSER OPTIONS | SUPER SERIES LED STRIP OPTIONS | | |
|------------------|------------------|--------------------------------|-----------------|--------------|
| Surface mounted | Satin | Lumens per metre | Watts per metre | Colour temp. |
| | | 310lm | | 2700K |
| | | 330lm | 3W | 3000K |
| | | 345lm | | 4000K |
| | | 760lm | | 2700K |
| | | 800lm | 7W | 3000K |
| | | 840lm | | 4000K |
| | | 1520lm | | 2700K |
| | | 1600lm | 14W | 3000K |
| | | 1680lm | | 4000K |

- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.


ACCESSORIES

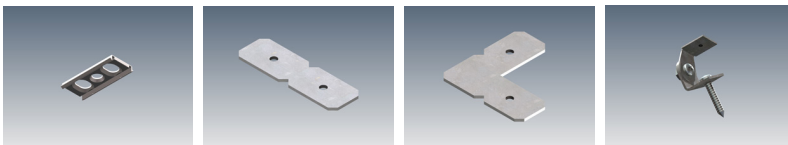

JMC-12 Joinery mounting clip JN-ST Straight joiner JN-90 90 degree joiner MB-ADJ Adjustable mounting bracket

ADDITIONAL INFORMATION

| | |
|--------------|---|
| Applications | Mirror lighting, kitchen joinery, display shelving. |
| Installation | Interior or exterior (with IP67 rated LED strip). |
| Materials | Extruded aluminium body, PMMA diffuser, AES plastic end caps. |
| Finish | Natural silver anodised or custom powder coat. |
| Light source | LED ribbon strip. |
| Power supply | 24V DC - remote driver options ranging from 6W up to 320W. |
| Dimmable | Various options available, please enquire. |

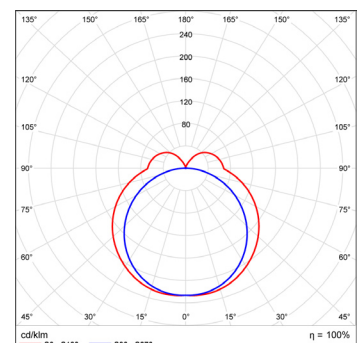

Polar curve for 1340 lumen LED strip with satin diffuser.

