




Pendant Luminaires | 220-240 V  
180 topLED 35 W DC - 35 W AC | CRI 90  
**8682**

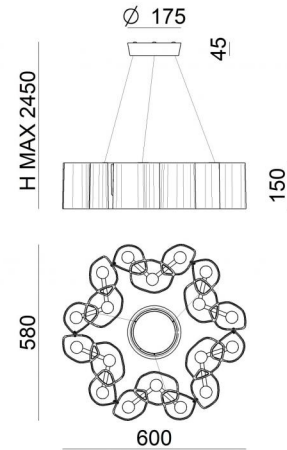

Technical data	
Construction year	2019
Type	Pendant Luminaires
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	35 W
Source lumens	3523 lm
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2500 m
Resin potting	No
Type of light emission	Double emission
Net weight	4,515 Kg
Electrostatic discharge protection	No
Surge protection	No

### Finishing casing

Material	Die-cast Aluminium
Colour	white
Processing	Powder coating

### Finishing diffuser

Material	PC
Colour	white

### Cables Pendant Luminaires

Max cable length	2500 mm
------------------	---------



Pendant Luminaires | 220-240 V | 180 topLED 35 W DC - 35 W AC | CRI 90 | Base  
**8682**

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 180 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3523 lm, with a 100.7 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 4,515 kg.

The total absorbed power is 35 W. The power supply cable is included and features a 2500 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	69 %
Source lumens	3523 lm
Delivered lumens	2432.85 lm
Consumption	35 W
Luminaire efficacy	69 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25 )	



Dimmer  
220-240V

**Code**  
KIT0026



Dimmer  
Radio-frequenza, 85-240V

**Code**  
KIT0080