


Oxygen_FL2



Floor Lamp | 220-240 V
70 topLED 31 W DC - 36 W AC | CRI 90
8100



Technical data	
Designer	Pio e Tito Tosio
Construction year	2016
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	31 W
Source lumens	4042 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	4 m
Electric socket	Type F+E
Resin potting	No
Type of light emission	Double emission
Net weight	18.8 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	PU
Colour	Azure/white

Finishing diffuser

Material	PMMA
Colour	transparent
Processing	Laser engravings

Finishing mounting frame

Material	Iron
Colour	white
Processing	Coating



Floor Lamp | 220-240 V | 70 topLED 31 W DC - 36 W AC | CRI 90 | Base 8100


Double emission floor lamp for indoor application. The warm white LED light source with a general lighting light distribution is composed of 70 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 4042 lm, with a 130.4 lm/W nominal luminous efficacy.

The device body is made of pu and features a azure/white finish; the diffuser is made of pmma with a laser engravings treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 18.8 kg.

The total absorbed power is 31 W. The power supply cable is included and features a 4 m lenght.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

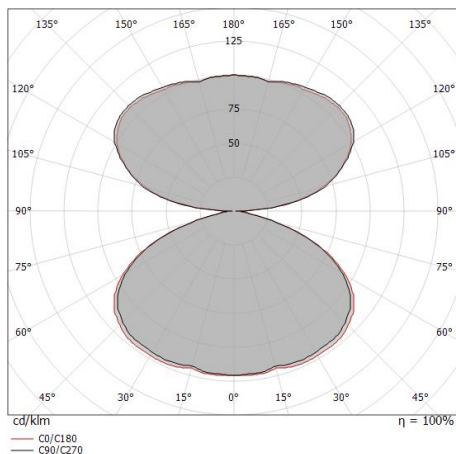

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	2.61 2.63	E(0°) 1048 E(C90) 24 E(C0) 24
1.0	5.21 5.27	E(0°) 262 E(C90) 6 E(C0) 6
1.5	7.82 7.90	E(0°) 116 E(C90) 3 E(C0) 3
2.0	10.42 10.53	E(0°) 66 E(C90) 2 E(C0) 1
2.5	13.03 13.16	E(0°) 42 E(C90) 1 E(C0) 1
3.0	15.63 15.80	E(0°) 29 E(C90) 1 E(C0) 1

— C0/C180 (Half-peak divergence: 138.4°)
- - C90/C270 (Half-peak divergence: 138.0°)

Illuminotechnical Features

Light Output Ratio (LOR)	53 %
Source lumens	4042 lm
Delivered lumens	2165 lm
Consumption	36 W
Luminaire efficacy	60 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

LED Life / Failure Ratio

L80 B20 C0 80000h

UGR

UGR axial	12.7
UGR transversal	12.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	138°