




Pendant Luminaires | 220-240 V
200 topLED 42 W DC - 48 W AC | CRI 90
8539

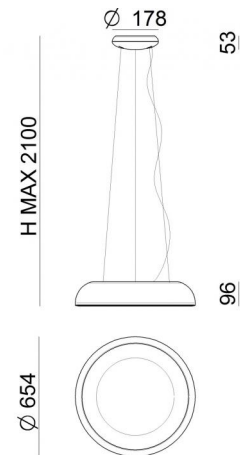

Technical data	
Construction year	2018
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	42 W
Source lumens	5671 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2000 m
Resin potting	No
Type of light emission	Single emission
Net weight	7.350 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Iron
Colour	white
Processing	Powder coating

Finishing diffuser

Material	PC
Colour	opaline

Finishing mounting frame

Material	Iron
Colour	white
Processing	Powder coating

Cables Pendant Luminaires

Max cable length	2000 mm
------------------	---------

Pendant Luminaires | 220-240 V | 200 topLED 42 W DC - 48 W AC | CRI 90 | Base 8539

Single emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 200 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5671 lm, with a 135.0 lm/W nominal luminous efficacy.

The device body is made of iron and features a white finish, processed by means of powder coating; the diffuser is made of PC; the mounting frame is made of iron, with a white finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 7.350 kg.

The total absorbed power is 42 W. The power supply cable is included and features a 2000 m length.

The device features protection class I and can be ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	45 %
Source lumens	5671 lm
Delivered lumens	2556 lm
Consumption	48 W
Luminaire efficacy	53 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

LED Life / Failure Ratio	
L80 B20 C0	80000h

UGR	
UGR axial	19.5
UGR transversal	19.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	144°

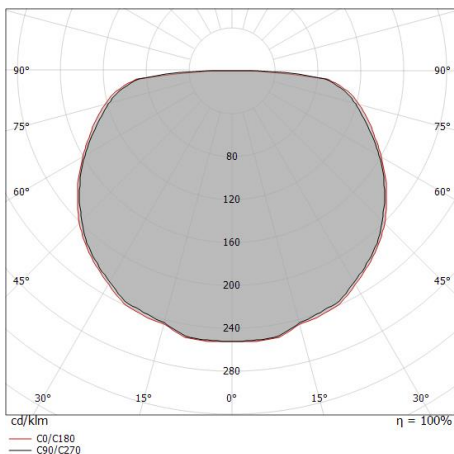

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	3.10 3.38	2579	37	30
1.0	6.19 6.75	645	9	7
1.5	9.29 10.13	287	4	3
2.0	12.38 13.50	161	2	2
2.5	15.48 16.88	103	1	1
3.0	18.58 20.26	72	1	1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 147.0°)
— C90/C270 (Half-peak divergence: 144.2°)



Dimmer
220-240V

Code
KIT0026



Dimmer
Radio-frequenza, 85-240V

Code
KIT0080