



Saturn_S

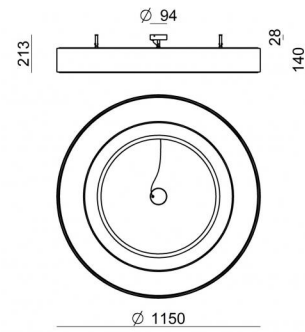

Ceiling Lights | 220-240 V
126 topLED 92 W DC - 98 W AC | CRI 90
7651



Technical data	
Construction year	2016
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	92 W
Source lumens	13961 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	18 Kg

Finishing casing

Material	Iron
Colour	white
Processing	Coating

Finishing diffuser

Material	PE
Colour	neutral

Finishing mounting frame

Material	Iron
Colour	white
Processing	Coating



Ceiling Lights | 220-240 V | 126 topLED 92 W DC - 98 W AC | CRI 90 | Base 7651

Double emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 126 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 13961 lm, with a 151.8 lm/W nominal luminous efficacy.

The device body is made of iron and features a white finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 18 kg.

The total absorbed power is 92 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features

Light Output Ratio (LOR)	80 %
Source lumens	13961 lm
Delivered lumens	11265 lm
Consumption	98 W
Luminaire efficacy	114 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

LED Life / Failure Ratio


L80 B20 C0 80000h

UGR

UGR axial	21.3
UGR transversal	21.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	135°

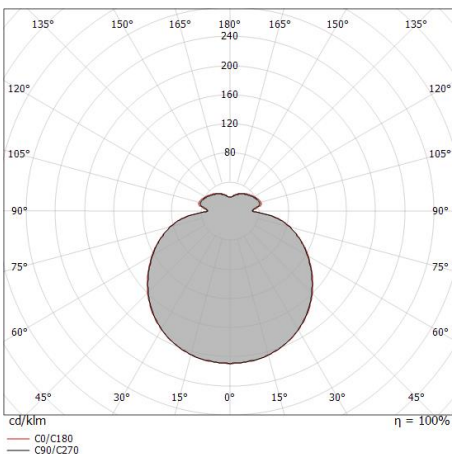

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	2.40 2.46	E(0°) 9429 E(C90) 268 E(C0) 251
1.0	4.80 4.93	E(0°) 2357 E(C90) 67 E(C0) 63
1.5	7.21 7.39	E(0°) 1048 E(C90) 30 E(C0) 28
2.0	9.61 9.85	E(0°) 589 E(C90) 17 E(C0) 16
2.5	12.01 12.31	E(0°) 377 E(C90) 11 E(C0) 10
3.0	14.41 14.78	E(0°) 262 E(C90) 7 E(C0) 7

— C0/C180 (Half-peak divergence: 135.8°)
— C90/C270 (Half-peak divergence: 134.8°)

Ceiling Lights | 220-240 V | 126 topLED 92 W DC - 98 W AC | CRI 90 | Base

7651

Double emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 126 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 13961 lm, with a 151.8 lm/W nominal luminous efficacy.

The device body is made of iron and features a white finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 18 kg.

The total absorbed power is 92 W.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	88 %
Source lumens	13961 lm
Delivered lumens	12395 lm
Consumption	98 W
Luminaire efficacy	126 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
UGR axial	21.6
UGR transversal	21.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	135°

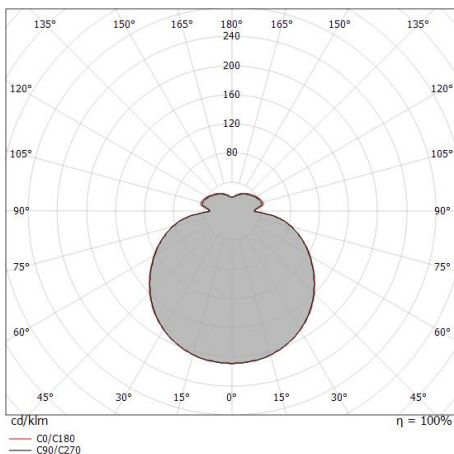

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	2.40 2.46	E(0°) 10375 E(C90) 295 E(C0) 276
1.0	4.80 4.93	E(0°) 2594 E(C90) 74 E(C0) 69
1.5	7.21 7.39	E(0°) 1153 E(C90) 33 E(C0) 31
2.0	9.61 9.85	E(0°) 648 E(C90) 18 E(C0) 17
2.5	12.01 12.31	E(0°) 415 E(C90) 12 E(C0) 11
3.0	14.41 14.78	E(0°) 288 E(C90) 8 E(C0) 8

— C0/C180 (Half-peak divergence: 135.8°)
— C90/C270 (Half-peak divergence: 134.8°)