


The Sweet 16 profile is a powerful, compact uplight/downlight solution. With a single LED strip for downlighting and two for uplighting, Sweet 16 is ideal for applications where high output and low-glare is key, such as boardrooms, reception counters and kitchen islands. Sweet 16 can be wired with two independent, dimmable circuits to achieve the perfect amount of light. Both wire and rod suspension options are available.

MOUNTING OPTIONS		DIFFUSER OPTIONS		SUPER SERIES LED STRIP OPTIONS			SUPER SERIES LED STRIP OPTIONS		
Wire suspended	Opal	Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.		
Rod suspended	Clear	310lm		2700K	1955lm		2700K		
Wall mounted		330lm	3W	3000K	2060lm	20W	3000K		
		345lm		4000K	2160lm		4000K		
		760lm		2700K	2400lm		2700K		
		800lm	7W	3000K	2530lm	26W	3000K		
		840lm		4000K	2650lm		4000K		
		1520lm		2700K					
		1600lm	14W	3000K					
		1680lm		4000K					


- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and RGB or RGBW colour change.  
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.  
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES

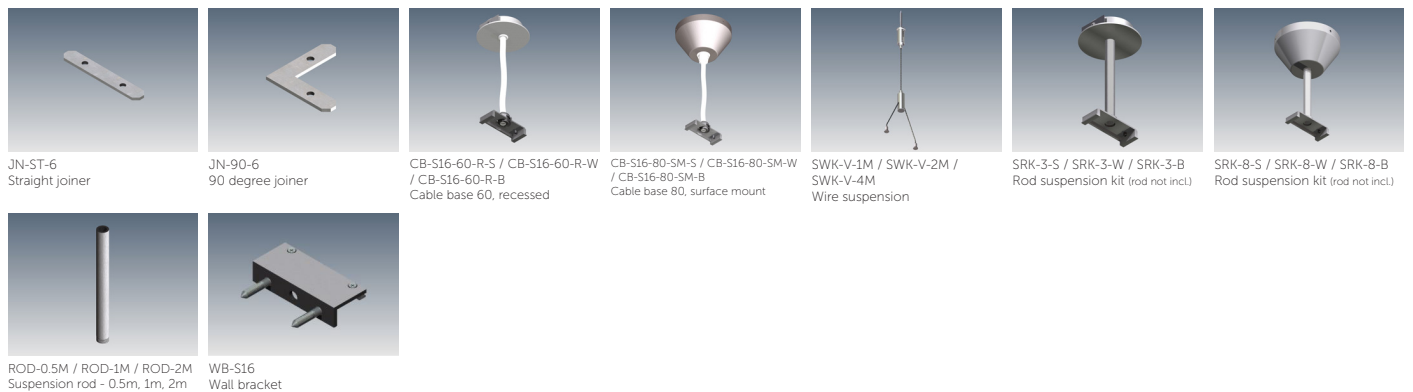

ADDITIONAL INFORMATION

Applications	Kitchen islands, boardroom tables, reception counters, office spaces.
Installation	Interior only.
Materials	Extruded aluminium body, polycarbonate diffuser, aluminium end caps.
Finish	Natural silver anodised or custom powder coat.
Light source	LED ribbon strip.
Power supply	24V DC - remote driver options ranging from 6W up to 320W.
Dimmable	Various options available, please enquire.

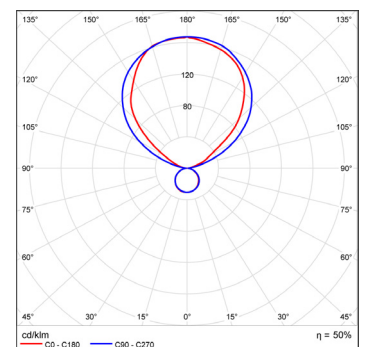

Polar curve for 3x1340 lumen LED strips with clear diffuser up and opal down.

