

Trimless Tim 15 is designed to recess seamlessly into joinery to offer dot-free lighting solutions. The small ribs either side of the profile allow Trimless Tim 15 to be friction-fitted into an 18mm routed slot in joinery without the need for screws. The flat diffuser provides an excellent, flush, high-level finish to the installation.

MOUNTING OPTIONS	DIFFUSER OPTIONS	SUPER SERIES LED STRIP OPTIONS		
Recessed	Opal	Lumens per metre	Watts per metre	Colour temp.
	Clear	310lm		2700K
		330lm	3W	3000K
		345lm		4000K
		760lm		2700K
		800lm	7W	3000K
		840lm		4000K
		1520lm		2700K
		1600lm	14W	3000K
		1680lm		4000K

- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.  
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.  
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

## ACCESSORIES




JN-ST  
Straight joiner



JN-90  
90 degree joiner

## ADDITIONAL INFORMATION

Applications	Task lighting in kitchen cabinetry, lighting for shelving or display units.
Installation	Interior and exterior (with IP67 rated LED strip).
Materials	Extruded aluminium body, polycarbonate diffuser, AES plastic end caps.
Finish	Natural silver anodised or custom powder coat.
Light source	LED ribbon strip.
Power supply	24V DC - remote driver options ranging from 6W up to 320W.
Dimmable	Various options available, please enquire.

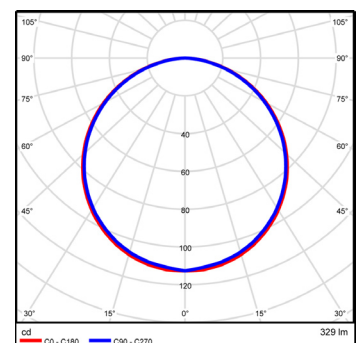

Polar curve for 1340 lumen LED strip with opal diffuser.



CANVAS

our work 303 VIDA

VIDA  
LIFE & CO.