




Wall Lights | 1 x powerLED 1,0 W 350 mA | CRI 80  
**92262N00**



29

Technical data	
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Optic	Diffused
Power	1 W
Luminous flux (source)	138 lm
Current intensity	350mA
CCT / Tonalità	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes


### Finishing casing


Material	Brass
Colour	white RAL 9010
Processing	Coating


### Finishing diffuser

Material	PC
Colour	white

### Electronics

 On/Off Driver  
1 art.

 On/Off Driver  
3 art.

 On/Off Driver  
6 art.

Wall Lights | 1 x powerLED 1,0 W 350 mA | CRI 80  
**92262N00**

Single emission wall lights for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 138 lm, with a 138.0 lm/W nominal luminous efficacy.


The device body is made of brass and features a white ral 9010 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP65; the total weight is of 0.054 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1,0 W. The power supply cable is included and features.

The device features protection class III and can be wall lights-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	65 %
Luminous flux (source)	138 lm
Luminaire luminous flux	90 lm
Consumption	1,0 W
Luminaire efficacy	90 lm/W
Colour temperature	4000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	< 25

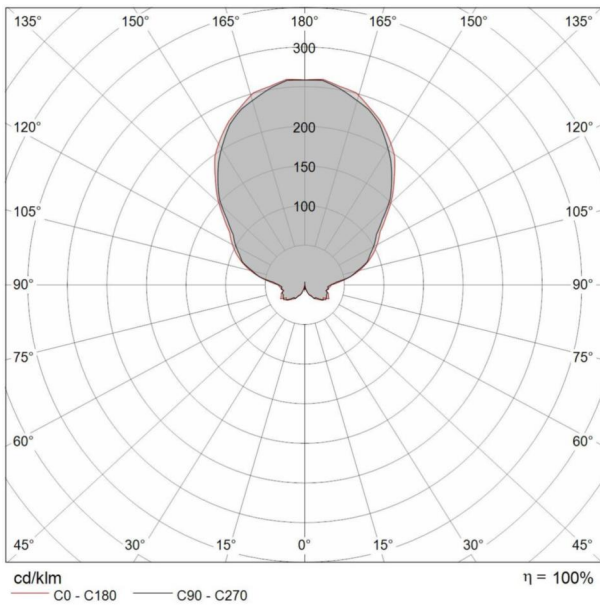



Outer casing  
L=42mm, H=35mm, D=35mm

**Code**  
84336



Outer casing  
L=49mm, H=60mm, D=60mm

**Code**  
84915